



HYDRAULIC PISTON PUMPS

OPEN CIRCUIT

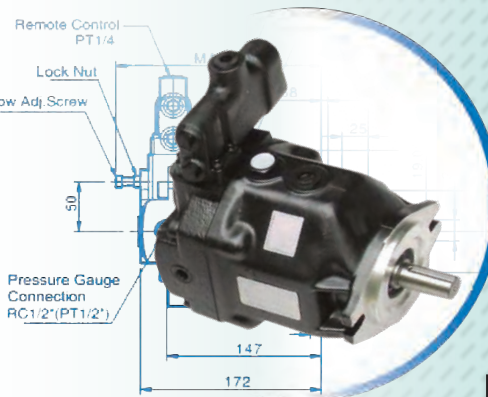

ER10/16/22 Series

10cc/rev - 22cc/rev

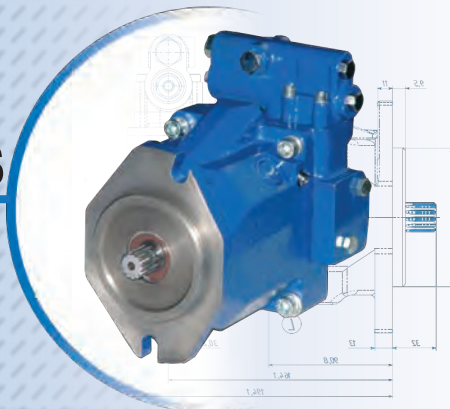


PVC1.28 Series

28cc/rev




P10V45 Series

21cc/rev - 45cc/rev

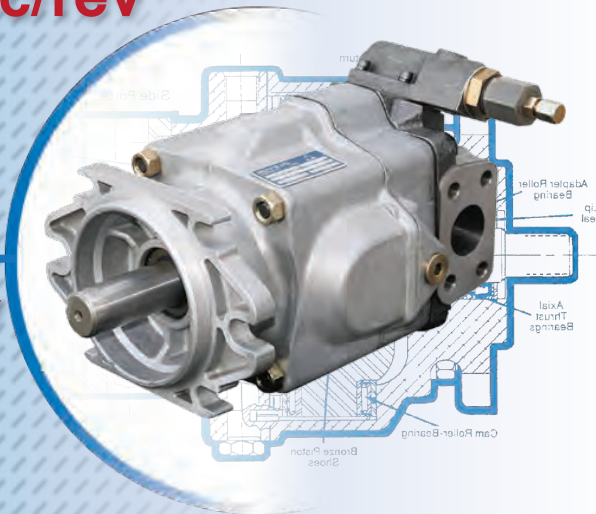

AP40B Series

26cc/rev - 65cc/rev

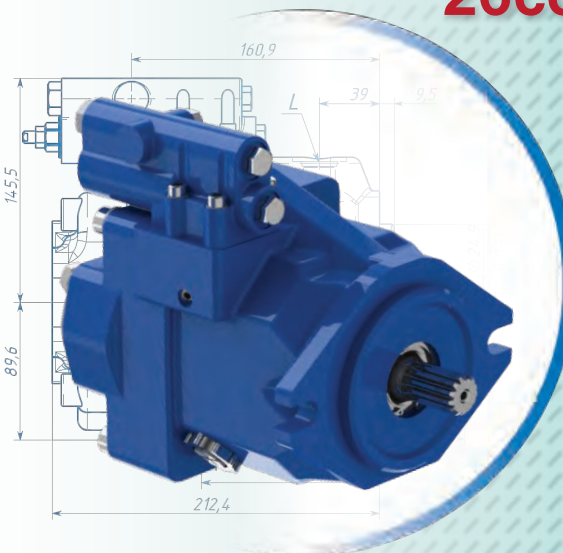

PVC1.85 Series

85cc/rev

EUROLINE HYDRAULICS

DELTA^Q

ER10/16/22 Series

Max Pressure:	220 Bar
Speed Range:	500 - 2200 Rpm (2600 Rpm with approved inlet conditions)



Mounting	Shaft Options	Control Types	Thru-Drive	Additional Options
SAE A 2 bolt only	3/4" Keyed 7/8" 13T Spline 5/8" 9T Spline	Pressure Compensator Load Sensing Remote Pressure Comp More available on special order	N/A	Varied porting options

P10V45 Series

Max Pressure:	275 Bar (350 Bar Peak)
Max Speed:	2600 Rpm (3100 Rpm with approved inlet conditions)



Mounting	Shaft Options	Control Types	Thru-Drive	Additional Options
SAE B 2 bolt only	7/8" 13T Spline 1" 15T Spline 7/8" Keyed	Pressure Compensator Load Sensing Pressure Comp L/S with internal Bleed More available on special order	1" 15T Spline	Slim fit design Min & Max volume stops Varied porting options
			1" Keyed SAE 2 Bolt A Female SAE 2 Bolt B Female	

AP40B Series

Max Pressure:	241 Bar
Max Speed:	2000 Rpm (3000 Rpm with approved inlet conditions)



Mounting	Shaft Options	Control Types	Thru-Drive	Additional Options
SAE B 2 bolt SAE C 2/4 bolt	1 1/4" 14T Spline 1 1/4" Keyed 7/8" 13T Spline 1" 15T Spline	Pressure Compensator Load Sensing Pressure Comp L/S with internal Bleed More available on special order	5/8" 9T Spline	Min & Max volume stops Varied porting options
			7/8" 13T Spline SAE 2 Bolt A Female SAE 2 Bolt B Female	

Refer sales dept. for options and specifications on the
PVC1.28 & PVC1.85

